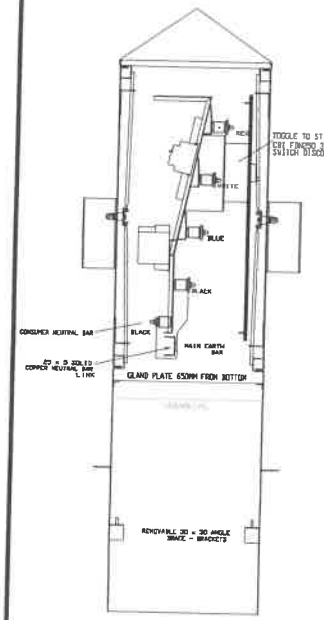

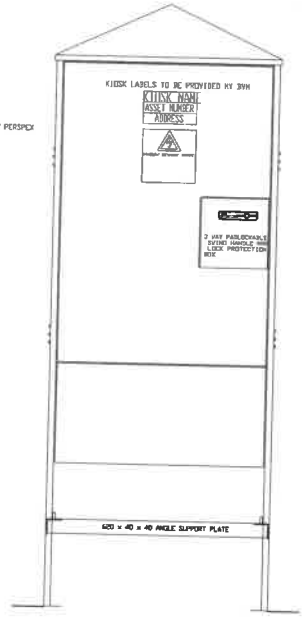

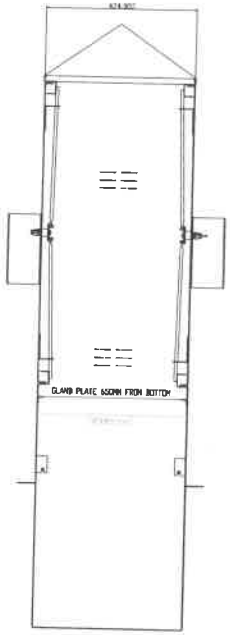

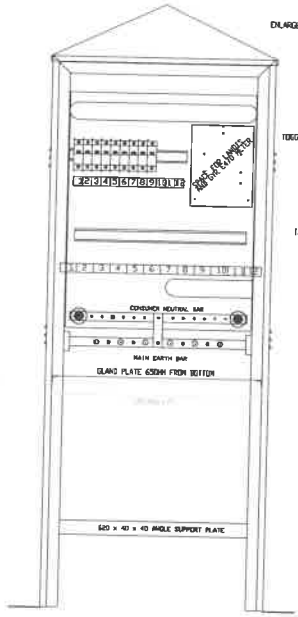

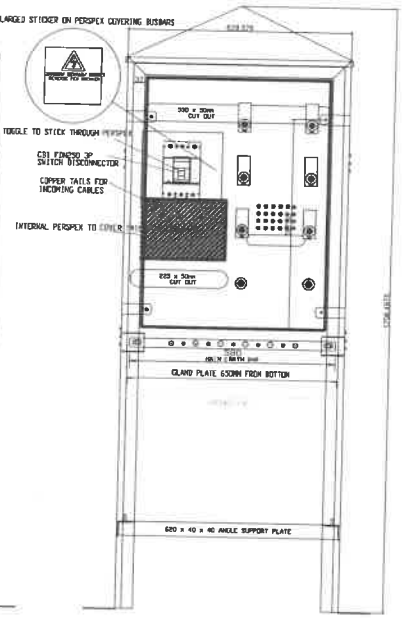



MECHANICAL

MATERIAL & THICKNESS 2.0MM 3CR12
DOOR MECHANISM 3 POINT LOCKING MECHANISM
HINGES INTERNAL BUILT
FINISH POWDER COATED - AMERADD GREEN
COPPER BRAIDED EARTH STRAPS FOR DOORS AND
BUTTON REMOVABLE DOORS 200MM LONG
ALL KIOSKS LABELLED WITH KIOSK ASSET& STREET ADDRESS
GLAND PLATE TO SIT AT 650MM FROM THE FLOOR
GROUND LEVEL AT 600MM
GLAND PLATE AS PER THE ABOVE

ELECTRICAL EQUIPMENT LIST

COPPER BUSBAR 1 40X5 CRVED
1 25X4 (NEUTRAL + EARTH)
1 FRONT AND REAR NEUTRAL & EARTH
1 BUSBAR MOUNTED ON INSULATORS
1 X C91 FINGRO 3P SWITCH DISCONNECTOR
1 X 63A 1P 6KA CURVE C
SUPPLIER TO WIRE ALL ELECTRICAL EQUIPMENT
PROVISION FOR:
9 X LANDIS & GYR SPLIT PREPAYMENT METERS
FREE ISSUE FROM BVM / LANDIS

SCALEBAR

N.T.S

Copyright of this document and/or drawing rests with BVM , unless otherwise agreed to in writing and no part of this document and/or drawing may be reproduced copied or transmitted in any form or by any means whatsoever to any person without written permission by the copyright holder.

All dimensions must be verified on site before the works commence. Refer any discrepancies to the Engineer.

ISSUED FOR RFQ

REV	DESCRIPTION	DATE	REV BY	CHKD
A	ISSUED FOR RFQ	17-02-22		

REVISIONS

DESIGNED

DRAWN

CHECKED

BREEDE VALLEY
MUNICIPALITY • MASEPALITSI • UMASIPALA

APPROVED
BVM: FM
DATE: 17-02-2022

PROJECT: CONSTRUCTION OF SECONDARY ELECTRICAL SERVICES FOR 38 ERVEN AT HOOSAIN CRES, JOHNSON PARK, WORCESTER

TITLE: CUSTOMER DISTRIBUTION KIOSK

SCALE on A2	SHEET
N.T.S.	1 OF 1
CONTRACT No.	PROJECT No. R161019

DRAWING No. R161019/E1 REV A

COORDINATE SYSTEM: